


Thin Slab 4 Leg Coil Inserts

Very versatile insert intended for use for lifting and handling thin slab concrete. The coil is welded to four "L" shaped legs.

ITEM CODE	THREAD (D)	INSERT LENGTH (L)	BODY LENGTH (B)	WIRE DIA. (C)	SPREAD (S)	SWL (LBS)	STRUTS
C53C0753	3/4"	3"	1-5/8"	0.375"	7-1/16"	2000	4
C53C07540	3/4"	4"	1-5/8"	0.375"	7-1/16"	2000	4
C53C0755	3/4"	5"	1-5/8"	0.375"	7-1/16"	2500	4
C53C1035	1"	3-1/2"	2-1/16"	0.375"	9-3/8"	3000	4
C53C1040	1"	4"	2-1/16"	0.375"	9-3/8"	3000	4
C53C1055	1"	5-1/2"	2-1/16"	0.375"	9-3/8"	3000	4
C53C10612 W/6	1"	6-1/2"	2-1/16"	0.375"	9-3/8"	3000	6
C53C1240	1-1/4"	4"	2-1/16"	0.375"	9-3/4"	3000	4

Safe working loads based on approximate 4:1 Safety Factor in 3,000 psi normal weight concrete.

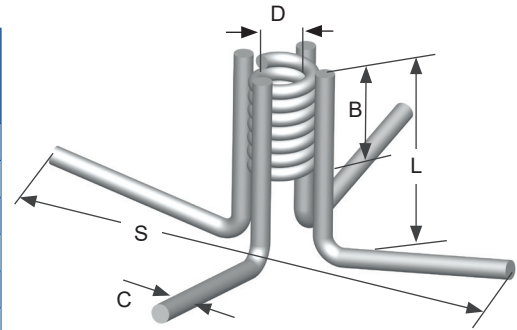

Expanded Coil Inserts With 2, 4 and 6 Struts

Coil is welded to dual flared wire loop struts. Intended for use in heavy anchorage conditions. Inserts located at the end of either two or four wire connecting struts.

ITEM CODE	STRUTS	THREAD (D)	INSERT LENGTH (L)	BODY LENGTH (B)	WIRE DIA. (C)	OVERALL WIDTH (G)	SWL (LBS)
C56C-3/4	2	3/4"	4-1/2"	1-5/8"	0.440"	2-1/8"	4250
C56C-1	2	1"	5-1/2"	2-1/16"	0.440"	2-3/4"	6250
C58C-1-1/4	4	1-1/4"	7-1/2"	2-3/8"	0.440"	3"	12000
C60C-1-1/2	6	1-1/2"	9-1/2"	2-9/16"	0.440"	3"	16250

Safe working loads based on approximate 4:1 Safety Factor in 3,000 psi normal weight concrete.

