
## **Flat Steel System**




TON	ITEM CODE	A	В	C	SYSEM CODE
2T	FHP02	5/8"	2-3/4"	10mm	2.5T
4T	FHP04	1-1/4"	3-3/8"	10mm	5.0T
8T	FHP08	1-3/4"	4-7/8"	12mm	10.0T
22T	FHP22	2-1/2"	7"	16mm	22.0T

CONAC Concrete Lifting Solutions

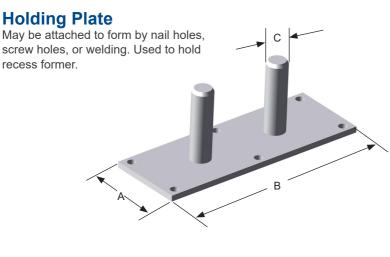

Ψ

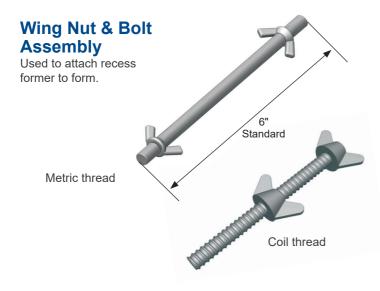



TON	ITEM CODE	STANDARD Rod Length	THREAD DIAMETER & TYPE	SYSTEM CODE
2T	FWN02	6"	M8	2.5T
4T	FWN04	6"	M8	5.0T
8T	FWN08	6"	M12	10.0T
22T	FWNC 1/2"	5-1/2"	1/2" COIL	22.0T
	FWNC 1/2"	5-1/2"	1/2" COIL	5.0T
	FWNC 3/8"	6"	3/8" COIL	5.0T

## Shear Bar

Used with flat steel erection anchor to increase shear capacity.

TON	ITEM CODE	SHEAR BAR Diameter	MIN. PANEL THICKNESS	HIGH (H)	LENGTH (L)	SYSTEM CODE
2T	FSB02	1/2"	4"	2-1/2"	13-7/8"	2.5T
4T	FSB04	1/2"	5-1/2"	3-5/16"	13-7/8"	5.0T
8T	FSB08	1/2"	7-1/2"	4-15/16"	13-7/8"	10.0T



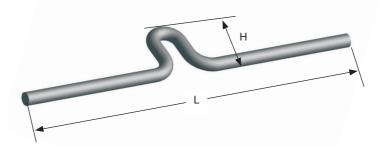

36

æ