


Threaded Lifting System



Lifting Loops

Most economical lifting units for this system. Manufactured from flexible wire rope and tagged with a color code to match the capacity of the anchors. For tension only - limited to 45 degrees from vertical. Galvanized cable loop with mill finished threaded stud.

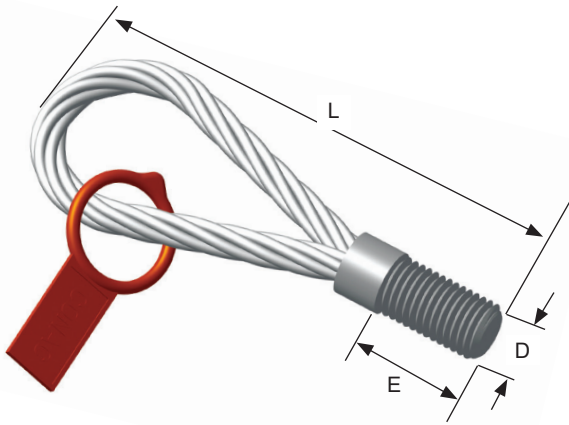


PART NUMBER	COLOR CODE	SWL TENSION (LBS)	THREAD SIZE (D)	THREAD LENGTH (E)	LENGTH (L)
TLL005	Orange	1000	Rd12x1.75	3/4"	6-1/8"
TLL008	White	1600	Rd14x2.0	7/8"	6-1/8"
TLL012	Red	2400	Rd16x2.0	1"	6-1/8"
TLL016	Pink	3200	Rd18x2.5	1-1/8"	7-1/2"
TLL020	Light Green	4000	Rd20x2.5	1-1/4"	8-1/2"
TLL025	Dark Grey	5000	Rd24x3.0	1-9/16"	10"
TLL040	Emerald Green	8000	Rd30x3.5	2-3/16"	12"
TLL063	Light Blue	12600	Rd36x4.0	2-5/8"	13-1/3"
TLL080	Light Grey	16000	Rd42x4.5	3-1/8"	17"
TLL125	Yellow	25000	Rd52x5.0	3-3/4"	19"

Safe working loads based on approximate 5:1 Safety Factor.

Lifting Loop With Pressure Plates

Most versatile lifting units for Waved Tail and Flat Steel Plate Anchors. Tagged with a color code to match the capacity of the anchors. Retain the flexibility of the regular Lifting Loops w/o the need for Distribution Basins when used in extreme shear conditions. Plated.

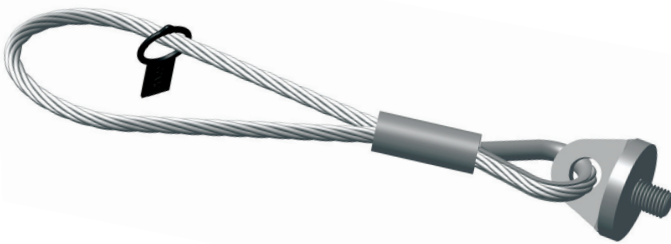


ITEM CODE	COLOR CODE	SWL (LBS)	THREAD SIZE
TLP005	Orange	1000	Rd12
TLP008	White	1600	Rd14
TLP012	Red	2400	Rd16
TLP016	Pink	3200	Rd18
TLP020	Light Green	4000	Rd20
TLP025	Dark Grey	5000	Rd24
TLP040	Emerald Green	8000	Rd30
TLP063	Light Blue	12600	Rd36
TLP080	Light Grey	16000	Rd42
TLP125	Yellow	25000	Rd52

Safe working loads based on approximate 5:1 Safety Factor.

Plastic Cap

Used after casting to plug the threaded opening in the anchors. Grey plastic.



ITEM CODE	SYSTEM CAPACITY TONS	THREAD SIZE	SURFACE DIA. OF CAP
TCS005	0.5	Rd12	3/4"
TCS008	0.8	Rd14	7/8"
TCS012	1.2	Rd16	1"
TCS012	1.6	Rd18	1-1/8"
TCS020	2	Rd20	1-1/4"
TCS025	2.5	Rd24	1-3/8"
TCS040	4	Rd30	1-3/4"
TCS063	6.3	Rd36	2-1/16"
TCS080	8	Rd42	2-3/8"
TCS125	12.5	Rd52	2-7/8"