


THREADED PLASTIC INSERT

Simple and economical method for anchoring to concrete. Available in three sizes manufactured from non-corrosive glass fiber reinforced polyamide.

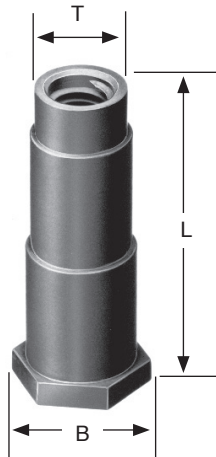

PART NO.	THREAD TYPE UNC	INSERT LENGTH (L)	BASE DIAMETER (B)	TOP DIAMETER (T)	TENSION CAPACITY (LBS)	QTY. PER CARTON
TPI 038	3/8"	1-5/8"	1"	9/16"	1,650	500
TPI 050	1/2"	2-9/16"	1-1/16"	11/16"	2,280	250
TPI 075	3/4"	2-3/4"	1-1/2"	1"	3,040	200

Note: Tension capacities are based on the material strength of the insert, tested at 70°F with a 3:1 safety factor applied to the ultimate load. Tests were conducted with bolts threaded fully into the insert.

Should not be used for lifting.