


TT ANCHOR SYSTEM


concrete accessories

CONAC TT ANCHOR (SPECIAL)


Designed for lifting precast double tees, available in 7.5T and 9T. Rubber and plastic recess formers available.



Plastic Recess Former for TT-Anchor



Rubber Recess Former for TT-Anchor

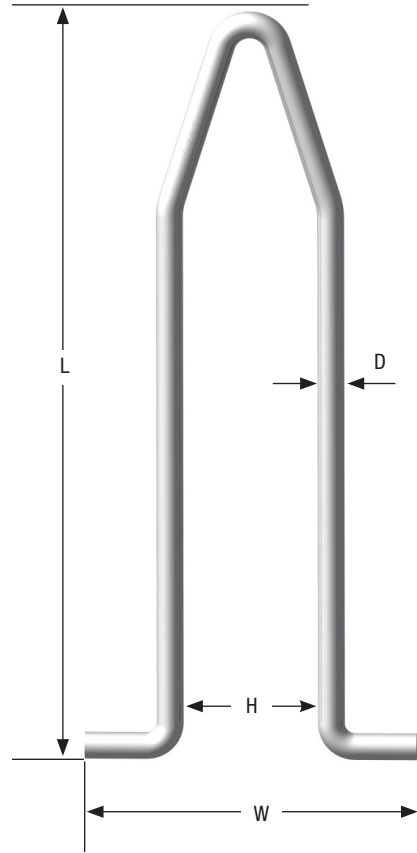

TON	PART NUMBER	LENGTH (L)	OUTSIDE WIDTH (W)	INSIDE WIDTH (H)	DIAMETER (D)	SWL TENSION (LBS)	UML TENSION (LBS)
7.5	TT 7.5T SP	18"	7-3/4"	3-1/8"	5/8"	15,000	60,000
9	TT 9T SP	22-7/8"	7-7/8"	3"	3/4"	18,000	72,000

UML= Ultimate Mechanical Load in tension

Safe working loads based on 4:1 Safety Factor in 3,500 psi normal weight concrete.



CALL US TOLL FREE
1-800-336-2598

www.conacweb.com